CHENGDE JP TECHNOLOGY CO., LTD
D609, Floor 6, Technology and Innovation Center, High-tech Industrial Development Zone,
Chengde 067000, Hebei, China || Tel: (0086) -19910326800
Email:jessie.gao@smartlifetech.net || web:www.smartlifetech.net

FCU Thermostat Catalogue

Picture	P/N	Descripton	Wiring Diagram
	FC610 (Wi-Fi & Modbus RS485)	*2 normally open contacts, 250 V load max 3 A (heating & cooling via 2-point control) *2x 0..10 V for heating and cooling,1x 0..10 V for fan *3-speed fan *input for external sensor NTC10K, occupancy sensor and key card switch *RS485 Modbus *WIFI 2.4G wifi communication *24DC/AC 50/60Hz * Black/ Gray/ Golden color for choice	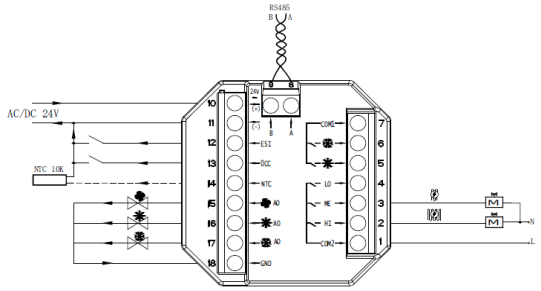
	FC221-5DO	*5 normal open contacts for heating & cooling via 2-point control or PWM, 3-speed fan (with 250V loading max 3A) *HMI design and Summer / Witter setting *Floading valve (optional) *ABS material *Touch display / Flush mounting *For Four-pipe (default) or Two-Pipe fan coil *Power supply 24V/3W *ESI/OCC/Fire-Alarm function *WiFi function (optional, 220Vac)	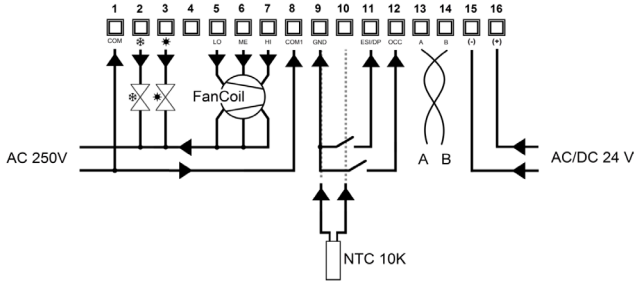
	FC221-2AO3DO	*2*0..10V for heating & cooling *3 normal open contacts for 3-speed fan (with 250V loading max 3A) *A 6-way valve can be used *Floading valve *HMI design and Summer / Witter setting *For Four-pipe (default) or Two-Pipe fan coil *Power supply 24V/3W *ESI/OCC/Fire-Alarm function *WiFi function (optional, 220Vac)	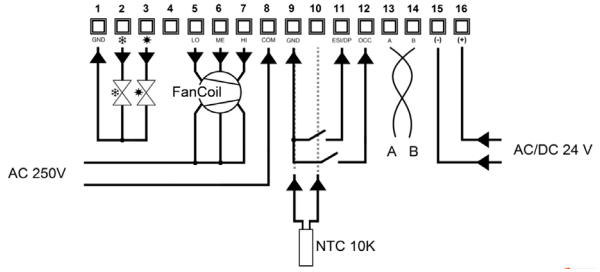

CHENGDE JP TECHNOLOGY CO., LTD
D609, Floor 6, Technology and Innovation Center, High-tech Industrial Development Zone,
Chengde 067000, Hebei, China || Tel: (0086) -19910326800
Email:jessie.gao@smartlifetech.net || web:www.smartlifetech.net

FCU Thermostat Catalogue

	FC221-3AO2DO	*3*0..10V for heating & cooling and fan *2 normal open contacts for electrical heater (with 250V loading max 3A) *A 6-way valve can be used *Floading valve *HMI design and Summer / Witter setting *ABS material / Touch display *For Four-pipe (default) or Two-Pipe fan coil *Power supply 24V/3W *ESI/OCC/Fire-Alarm function *WiFi function (optional, 220Vac)	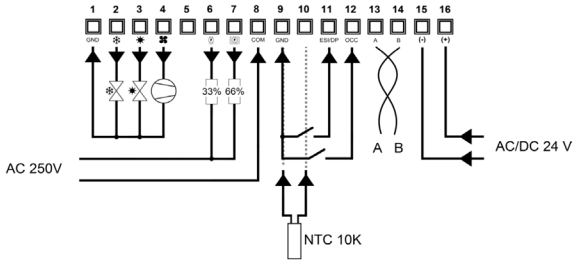
	FC261C (Modbus RS485)	Touch screen FCU thermosat Communicating Modbus RS485 Support Auto changeover and Manual type Power Supply 90Vac-265Vac 50Hz/60Hz Black background white back lights/ Memo while the power failure	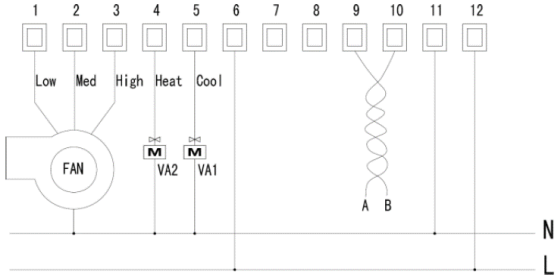
	ST-AC906 (Wi-Fi)	Touch screen FCU thermosat 2-pipe or 4-pipe fan coil 3-speed fan Weekly programming Modbus RS485 or Wi-Fi optional Power Supply 90Vac-250Vac 50Hz/60Hz Child lock	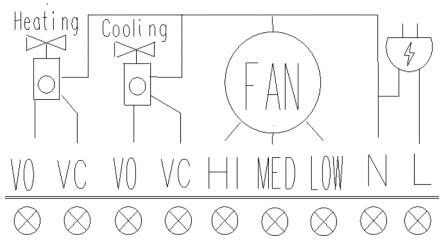

CHENGDE JP TECHNOLOGY CO., LTD
D609, Floor 6, Technology and Innovation Center, High-tech Industrial Development Zone,
Chengde 067000, Hebei, China || Tel: (0086) -19910326800
Email:jessie.gao@smartlifetech.net || web:www.smartlifetech.net

FCU Thermostat Catalogue

	HY08AC-04	Touch key FCU thermosat Communicating Modbus RS485 (optional) Key card (optional) 5+2 weekly program Power Supply 220Vac 50Hz/60Hz Memo while the power failure For 2-pipe or 4-pipe FCU	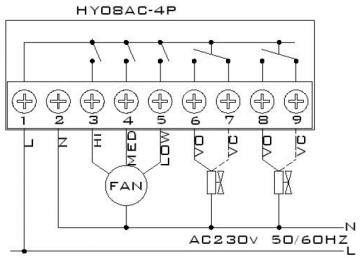
	HY08AC-02	Touch key FCU thermosat Modbus RS485 or Wi-Fi (optional) Key card (optional) 5+2 weekly program Power Supply 220Vac 50Hz/60Hz Memo while the power failure For 2-pipe or 4-pipe FCU Black backlight Black or white color optional	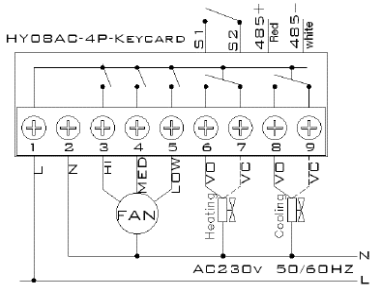
	HY08AC-03	Touch key FCU thermosat Modbus RS485 or Wi-Fi (optional) Key card (optional) 5+2 weekly program Power Supply 220Vac 50Hz/60Hz Memo while the power failure For 2-pipe or 4-pipe FCU Black backlight	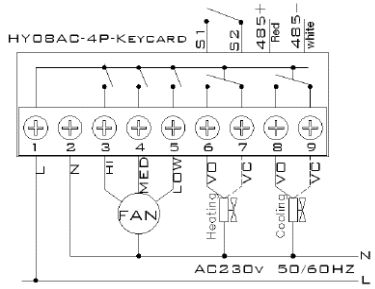

CHENGDE JP TECHNOLOGY CO., LTD
D609, Floor 6, Technology and Innovation Center, High-tech Industrial Development Zone,
Chengde 067000, Hebei, China || Tel: (0086) -19910326800
Email:jessie.gao@smartlifetech.net || web:www.smartlifetech.net

FCU Thermostat Catalogue

	HY08AC-01	Touch screen FCU thermosat Modbus RS485 or Wi-Fi (optional) Key card (optional) 5+2 weekly program Power Supply 220Vac 50Hz/60Hz Memo while the power failure For 2-pipe or 4-pipe FCU	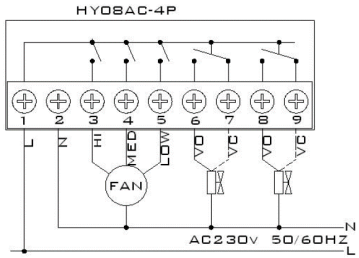
	FC182-5DO	*LCD digital thermostat *Floading valve (optional) *Communicating Modbus RS485 *ABS material *Touch display / Flush mounting *For Four-pipe (default) or Two-Pipe fan coil *Power supply 24V/3W *ESI/OCC/Fire-Alarm function	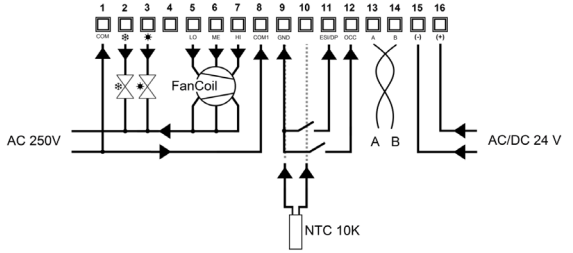
	FC182-2AO3DO	*LCD digital thermostat *Floading valve (optional) *Communicating Modbus RS485 *ABS material *Touch display / Flush mounting *For Four-pipe (default) or Two-Pipe fan coil *Power supply 24V/3W *ESI/OCC/Fire-Alarm function	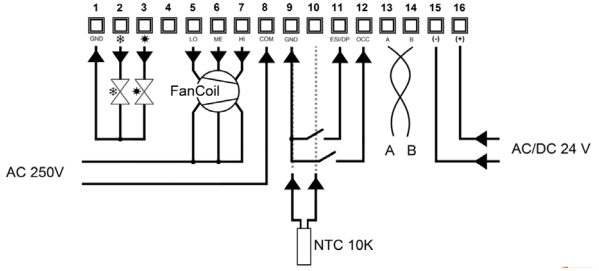

CHENGDE JP TECHNOLOGY CO., LTD
D609, Floor 6, Technology and Innovation Center, High-tech Industrial Development Zone,
Chengde 067000, Hebei, China || Tel: (0086) -19910326800
Email:jessie.gao@smartlifetech.net || web:www.smartlifetech.net

FCU Thermostat Catalogue

	FC182-3AO2DO	*LCD digital thermostat *Floading valve (optional) *Communicating Modbus RS485 *ABS material *Touch display / Flush mounting *For Four-pipe (default) or Two-Pipe fan coil *Power supply 24V/3W *ESI/OCC/Fire-Alarm function	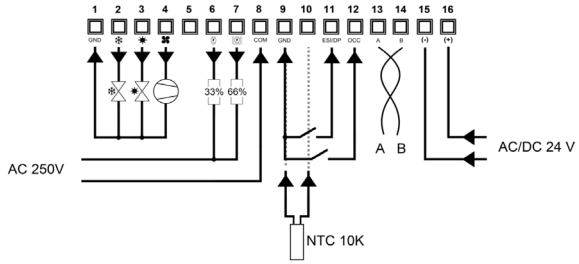
	FC221W-5DO	*5 normal open contacts for heating & cooling via 2-point control or PWM, 3-speed fan (with 250V loading max 3A) *HMI design and Summer / Witter setting *Floading valve (optional) *ABS material *Touch display / Flush mounting *For Four-pipe (default) or Two-Pipe fan coil *Power supply 90-265Vac *ESI/OCC/Fire-Alarm function *WiFi function	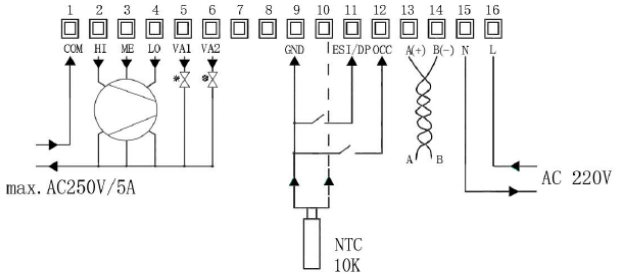
	FC221W-2AO3DO	*2*0..10V for heating & cooling *3 normal open contacts for 3-speed fan (with 250V loading max 3A) *A 6-way valve can be used *Floading valve *HMI design and Summer / Witter setting *For Four-pipe (default) or Two-Pipe fan coil *Power supply 220Vac *ESI/OCC/Fire-Alarm function *WiFi function	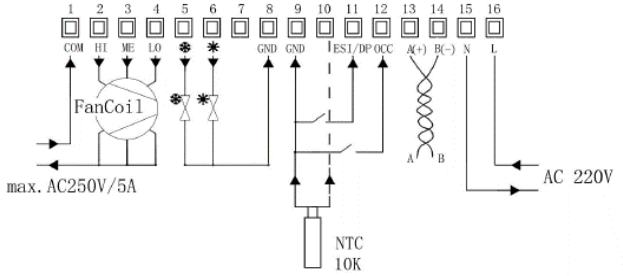

CHENGDE JP TECHNOLOGY CO., LTD
D609, Floor 6, Technology and Innovation Center, High-tech Industrial Development Zone,
Chengde 067000, Hebei, China || Tel: (0086) -19910326800
Email:jessie.gao@smartlifetech.net || web:www.smartlifetech.net

FCU Thermostat Catalogue

	FC221W-3AO2DO	*3*0..10V for heating & cooling and fan *2 normal open contacts for electrical heater (with 250V loading max 3A) *A 6-way valve can be used *Floading valve *HMI design and Summer / Witter setting *ABS material / Touch display *For Four-pipe (default) or Two-Pipe fan coil *Power supply 90-265Vac *ESI/OCC/Fire-Alarm function *WiFi function	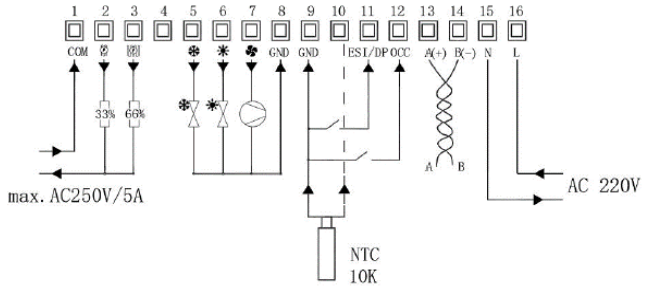
	HY01AC	Touch screen FCU thermosat Modbus RS485 (optional) External sensor (optional) 5+2 weekly program Power Supply 110Vac ~240Vac, 50Hz/60Hz Surface mounting Cooling only, heating only, 4-pipe Cooling or heating changeover	
	FC265	Touch screen FCU thermosat Communicating Modbus RS485 Support Auto changeover and Manual type Power Supply 90Vac-265Vac 50Hz/60Hz Black background white back lights/ Memo while the power failure	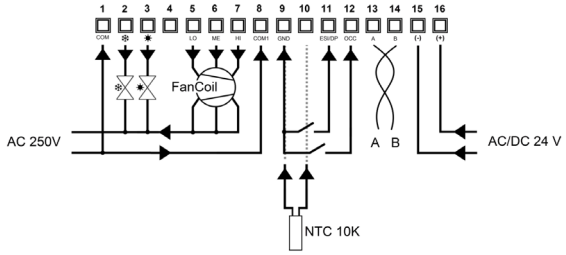

CHENGDE JP TECHNOLOGY CO., LTD
D609, Floor 6, Technology and Innovation Center, High-tech Industrial Development Zone,
Chengde 067000, Hebei, China || Tel: (0086) -19910326800
Email:jessie.gao@smartlifetech.net || web:www.smartlifetech.net

FCU Thermostat Catalogue

	HY609AC	Touch key FCU thermosat Modbus RS485 or Wi-Fi (optional) Key card (optional) 5+2 weekly program Power Supply 90-240Vac, 50Hz/60Hz Memo while the power failure For 2-pipe or 4-pipe FCU	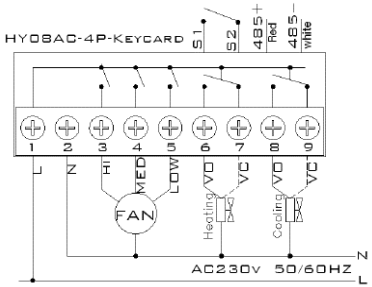
	ST-AC1700	AC+ floor heating thermosat 2-pipe 3-speed fan Weekly programming Modbus RS485 or Wi-Fi optional Power Supply 90Vac-250Vac 50Hz/60Hz Child lock Voice control	

Note: If need 0-10V modulating output, or Modbus RS485 or Wi-Fi, or card key and other special functions, please contact us freely.